

DATASHEET

FIȘA TEHNICĂ
SCHEDA DATI
ТЕХНИЧЕСКАЯ СПЕЦИФИКАЦИЯ
ADATLAP
ЛИСТ С ДАННИ
DÁTOVÝ HÁROK

OBO

Art. 01-1832

EN - Suspension for interior equipped with one SMD LED, structure and diffuser in aluminum painted in sand white.

RO - Suspensie pentru interior echipată cu un LED SMD, structură și dispersor din aluminiu vopsite alb mat.

IT - Sospensione per interni equipaggiata con un LED SMD, struttura e diffusore in alluminio verniciato bianco opaco.


RU - Люстра для интерьера, оснащенная светодиодом SMD, структура и рассеиватель из алюминия окрашенного в белый матовый цвет.

HU - Beltéri függeszték, SMD LED-el szerelve, matt fehér színű alumínium szerkezet és diszperzór.

BG - Висящ интериорен осветител за вграждане с SMD LED платка, корпус от алуминий в бял мат.

SK - Závesné interiérové svetidlo vybavené LED diódami SMD, hliníková štruktúra a difúzor lakovaná v matnej bielej farbe.

Product type	Suspension
Input voltage	220-240V, 50/60Hz
Power	4,5W
Led type	BRIDGELUX SMD LED 5050 1 pc x 4,5W
Color temperature	3000K
Led luminous flux	405 lm
System luminous flux	270 lm
CRI	90
OPTICS	38°
Dimmable	NO
Øuse (lm)	405
Pon (w)	4.5
FTM	1.089
ηTM	98.01
Energy efficiency class	F
Warranty (years)	3
Protection class	Class I
IP rating	IP20

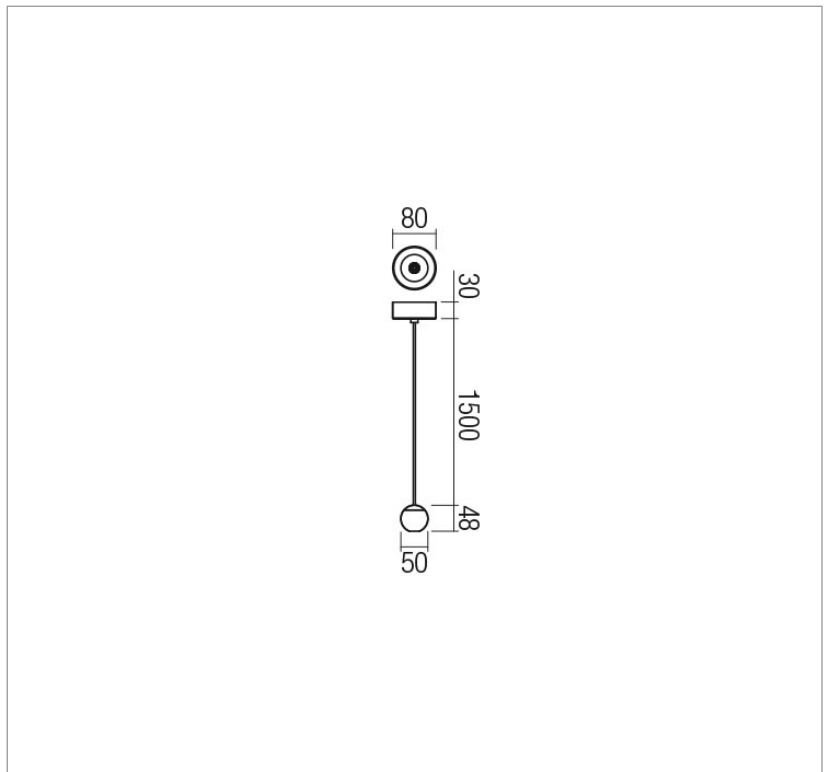

LED removal by a specialist **YES**
Driver removal by a specialist **YES**

Standards: EN 60598-1:2015 + A1:2018, EN 60598-2-1:2020, EN 60598-2-2:2012, EN 62493:2015, EN 62471:2008, EN 62031:2008 + A1:2013 + A2:2015, EN 60529:1992 + A2:2013, EN 55015:2019 + A11:2020, EN 61000-3-2:2019, EN 61000-3-3:2013 + A1:2019, EN 61547:2009.
Made in PRC.